PURPOSE

Assessor's Plats are used to reconcile parcel boundaries between 2 or more separate owners when the boundaries can not be accurately described or retraced due to:

- Monuments lost, obliterated, or never set.
- Gross errors in lot measurements or locations.
- Ambiguous descriptions.

Assessor's Plats may be used to simplify descriptions, for purposes of assessment, taxation, or conveyance, of parcels that otherwise could be described only by metes and bounds.

An Assessor's Plat may be used when uncertainty in locating existing parcels interferes with the siting of public streets, buildings, or other improvements.

ORDERING

An Assessor's Plat may only be ordered by the City Council, Village Board, or if in a Town, the Town or County Board having jurisdiction.

Parcel owners may petition the governing body to order an Assessor's Plat.

EFFECT OF RECORDING

An Assessor's Plat that has been certified, approved, and recorded at the Register of Deeds office has the following effects:

- Any plat or portion of plat included in or altered by the Assessor's Plat (including streets and other public dedications) is vacated.
- Previous parcel descriptions are replaced by reference to the Assessor's Plat parcel description.
- Reference to an Assessor's Plat parcel is sufficient description of the land for all purposes of assessment, taxation, and conveyance.

s. 70.27 (1) Wis. Stats.

s. 70.27 (1) Wis. Stats.

s. 70.27 (3) Wis. Stats.

CREATING AN ASSESSOR'S PLAT

The Surveyor must perform the following steps when creating an Assessor's Plat:

- Each parcel, building, improvement, fixture, street, public dedication, etc. must be surveyed and mapped using the best evidence available.
- The parcel surveys must conform with the records at the Register of Deeds office as much as possible.
- Temporary monuments showing the results of the survey must be set.
- The affected parcel owners must be notified (by certified mail to their last known address) of the survey so that they may view the map and monuments, and make known their agreement or disagreement with the temporary boundaries.
- When boundaries are reconciled and mutually agreed to by the owners of record, the agreements must be put in writing and recorded in the Register of deeds office. These boundaries, regardless of variance with descriptions of record, then become the true parcel boundaries.
- The Assessor's Plat must show the volume, page, and document number of the metes and bounds description of each parcel (above) corresponding to the parcel as designated on the Assessor's Plat. (See following example Boundary Line Agreement Table.)
- Parcels that have been conveyed or acquired without a recorded deed may be included on the Assessor's Plat, provided that a metes and bounds description of the parcel is shown.

s. 70.27 (5) Wis. Stats.

Assessor's Plat Boundary Line Agreement Table

I, the undersigned, hereby consent to the establishment of the boundaries of my land as surveyed and mapped by this assessor's plat and hereby consent to the lines shown hereon and the monuments marking my corners as a true representation of my property and that said boundaries shall be the true boundaries hereafter.

BLOCK	LOT	OWNER	VOL.	PAGE	DOC. NO.	AREA
1	1	John M. Smith	384	39	2716992	15,000 sf
1	2	JAMES B'BROWN AND SUSAN A. BROWN	289	210	1288510	21,000 sf
1	3	KON MIN AND MANON M. SONES	291	38	1299850	23,100 sf
1	4	Joseph Miller	342	215	1342501	18,720 sf
2	1	Sara Schmidt SARA M. SCHMIDT	342	216	1342502	22,200 sf
2	2	RUTHA. FRANK AND ROBERTL. FRANK	842	101	4577211	19,210 sf
2	3	Jason Sands	452	312	1985573	18,530 sf

MONUMENTATION AND MAPPING REQUIREMENTS

An Assessor's Plat is monumented in accordance with s. 236.15 (1) (ac)-(g). Monuments found and accepted are labeled as "found" on the map, and are not replaced even if the monument is not consistent with s. 236.15.

An Assessor's Plat must meet the requirements of s. 236.20 (1) regarding map size, material, margins, sheet numbering and scale. The scale requirements may be waived per s. 236.20 (L) when deemed appropriate by the department.

An Assessor's Plat must meet the requirements of s. 236.20 (2) (a), (b), (c), (d), and (e) regarding the depiction of boundaries and monuments, delineation of boundaries, and block and lot designations.

CERTIFICATES

The Assessor's Plat must show a sworn, notarized certificate by the Surveyor who made the plat that contains the following:

- The name of the governing body that ordered the Assessor's Plat, and the date of the order. Any resolution no., etc. pertaining to the order should be included.
- A location description of the land contained in the Assessor's Plat referenced by quarter-quarter section, government lot, section, town, range, and county.
- A metes and bounds description of the land commencing from a corner (not center of section) established by the U.S. Public Land Survey.
- If the land contained in the Assessor's Plat is wholly part or all of a plat of record, reference to the plat may be used in lieu of a metes and bounds description.
- A statement that the Assessor's Plat is a correct representation of all the exterior boundaries of the land surveyed and each parcel thereof.
- A statement that the Surveyor has fully complied with the provisions of s. 70.27 in filing the plat.

s. 70.27 (5) - (7) Wis. Stats.

s. 70.27 (7) Wis. Stats.

SURVEY AND MAPPING STANDARDS

In addition to the mapping requirements listed above, the Minimum Standards for Property Surveys outlined in A-E 7 apply.

The Assessor's Plat should also meet the accuracy of survey requirement of s. 236.15 (2), and the mapping standards as shown in s. 236.20 (2) (f) to (k); s. 236.20 (3) (a) to (e); s. 236.20 (4) (a) and (c); and s. 236.20 (5) (a) to (c).

s. 70.27 (2) & (8) Wis. Stats.

FILING AND RECORDING

Upon completion, the Assessor's Plat is filed with the clerk of the governing body that ordered the plat. Within 2 days of filing, the clerk must transmit the plat to the department of administration (plat review). The department has 30 days to review the plat.

After the department has determined that the Assessor's Plat complies with the applicable requirements of s. 236.15 and s. 236.20, the department will provide the clerk of the governing body with the recordable document bearing the certification of the department. The clerk must then promptly publish a class 3 notice per ch. 985 (see example in this section).

The plat must remain on file and be available for public inspection in the clerk's office for 30 days after the first publication. Within the 30 day period, any person or public body having interest in lands affected by the plat may bring suit to have the plat corrected.

If no suit is brought within the 30 day period, the governing body may then inscribe it's approval on the plat, and present the plat to the register of deeds for recording.

If suit is brought, any court ordered revisions to the plat must be made. The clerk must certify on the face of the plat that the revisions comply with the provisions of s. 70.27. The plat need not be resubmitted to the department of administration for review unless so ordered by the court. After any revisions are made, the governing body may then inscribe it's approval on the plat, and present the plat to the register of deeds for recording.

EXAMPLE OF CLASS III PUBLIC NOTICE FOR ASSESSOR'S PLAT

NOTICE - VILLAGE OF DOGPATCH

The ASSESSOR'S PLAT I OF THE VILLAGE OF DOGPATCH will be on file in the Administrative Offices of the Village of Dogpatch, 123 First Street, telephone 987-6543, for a period of 30 days commencing January 2, 1990 for public inspection in accordance with Section 70.27, Wis. Stats. The ASSESSOR'S PLAT I OF THE VILLAGE OF DOGPATCH is located in Government Lot 2, and the NE 1/4 and the NW 1/4 of the SW 1/4 of Section 3, T13N, R24E, Kickapoo County, WI. Persons interested in inspecting this plat may do so Monday through Friday from 7:45 a.m. to 11:30 a.m. and from 12:30 p.m. through 4:00 p.m., after which it will be offered to the Village Board for approval at its February 2, 1990 meeting.

Village Administrator, Village of Dogpatch

Publish: January 2, 1990

AMENDMENTS

Amendments or corrections to an Assessor's Plat may only be ordered by the governing body having jurisdiction. Amendments or corrections must be made on a plat of the area affected that is recorded with the register of deeds. The plat must be made and authenticated following the provisions of s. 70.27. (i.e. the plat is amended or corrected with another Assessor's Plat, and is subject to review by Department of Administration - Plat Review.) See OAG opinion in the Statutes, Rules & Opinions section of this manual for a discussion on amending and correcting an Assessor's Plat.

USES


An Assessor's Plat may be used to:

- Consolidate contiguous holdings of an owner into a single parcel.
- Show existing structures, driveways, setbacks, easements etc. and encroachments thereof.
- Show existing streets, alleys, sidewalks, and other public improvements.
- Show drainage, watercourses, lakes, ponds, wetlands, and other natural features.

An Assessor's Plat may not be used to:

- Divide parcels.
- Dedicate lands to the public.
- Create public or private streets, roads, or alleys.
- Create public or private parks, trails, open spaces etc.
- Create easements or other restrictions.

s. 70.27 (4) Wis. Stats.

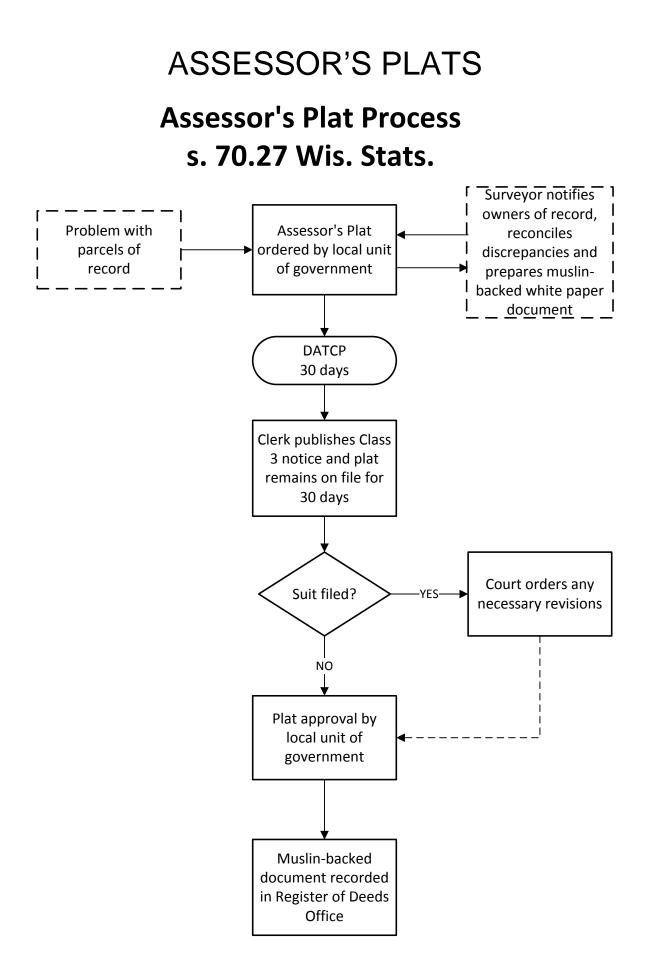

Assessor's Plat Surveyor's Certificate

I, (Surveyor's Name), Professional Land Survey	eyor, hereby certify	r: That I have surveyed	ed,
divided and mapped (Name of the Assessor's	Plat) by the direct	ion of the (City) (Villa	ge)
(Town) of (Name) , (County Name) , per Reso	lution #	, dated	; that
such plat correctly represents all exterior boun	daries and each pa	arcel therein; and tha	t this
land is located in the (1/4, 1/4) (Sec.), (Town)	, (Range), (City) (V	illage) (Town) of	(Name),
(County Name), Wisconsin, containing (#) acre	es of land and desc	cribed as follows:	
(Metes and bounds description)			
Dated this day of (month), (yr.). (Surve	eyor's Signature)		
Revised this day of (month), (yr.).	PLS No	Seal	

Assessor's Plat Approval Certificate

Resolved, that the Assessor's Pla	t in the (city) (village)
(town) of	, Having been ordered by the (common council) (village
board) (town board) and all notice	s required by s. 70.27 Wis. Stats. having been sent, and said
plat having been on file in the offic	e of the (city) (village) (town) Clerk for 30 days, and no suit
for correction of said plat having b	een commenced, (plat name),
is hereby approved by the (comm	on council) (village board) (town board).
Date	
Approved	
(Marray) () (illa va Drasida	

(Mayor) (Village President) (Town Chair)

Date _____

Signed _____

(Mayor) (Village President) (Town Chair)

(Clerk's Certificate, if required)

I hereby certify that the foregoing is a copy of a resolution adopted by the (common	
council)(village board)(town board) of the (city)(village)(town) of	·
(City) (Village) (Town) Clerk	

(Optional Clerk's Certifica	te, if required)	
STATE OF WISCONSIN) _	COUNTY)SS I,	
	, being the duly electe	d, qualified and acting clerk of the
(City) (Village) (Town) of	, ((County) do hereby certify that the
(common council)(village bo	oard)(town board) of the (City) (Village) (Town) of
pa	assed Resolution Number	on (Date), authorizing
me to issue a certificate of a	approval of the Assessor's Plat	(Plat Name), upon satisfaction of
certain conditions, and I do	hereby certify that all condition	s were satisfied and the APPROVAL
WAS GRANTED AND EFFI	ECTIVE ON THE	_ day of,
20		
Dated	Clerk	

(This checklist is NOT the statute, it is a guide to the statute.)

The following requirements must be met on an Assessor's Plat: Cross referenced from <u>s. 236.03 (2)</u>

MONUMENTS

<u>s. 70.27 (6)</u> Existing monuments accepted as correct shall be described and noted as "found", even if inconsistent with s. 236.15.

s. 236.15 SURVEYING REQUIREMENTS

(1) **MONUMENTS** (placed flush with the ground where practical.)

(ag) External boundaries of subdivision shall be monumented by: 2" o.d x 18" iron pipes or permitted equivalents with a minimum weight of 3.65 lbs./lin. ft. -Monuments are required at all corners, the ends of curves, at a point where a curve changes its radius, at all angle points of the boundary line and at all angle points along a meander line.
 -Monuments set along meander lines must be set back 20' or more from the top of bank or ordinary high water mark.

] (ac) Corners that fall within a street, must monument side line of street or actual corner.

(b) Internal boundaries, shall be monumented by: 2" o.d. x 18" iron pipes or permitted equivalents with a minimum weight of 3.65 lbs./lin. ft.
-Monuments are required at all block corners, the ends of curves, at a point where a curve changes its radius and at all angle points.

(c) Lot, outlot, park and public dedication corners shall be monumented by: 1" o.d. x 18" iron pipe or permitted equivalents with a minimum weight of 1.13 lbs./lin.ft.

(d) Lot, outlot, park and public dedication meander corners shall be monumented by:
 -1" o.d. x 18" iron pipe or permitted equivalents with a minimum weight of 1.13 lbs./lin.ft.
 Monuments must be set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of bank or ordinary high weight and the set back 20' or more from the top of back 20' or more from top of back 20' or more from top of back 20' or more from top of back 20' or more f

-Monuments must be set back 20' or more from the top of bank or ordinary high water mark.

- (f) In lieu of par. (c) and (d), any durable metal, stone or concrete monuments may be used if they are uniform throughout the plat and have a permanent magnet embedded near top of the monument.
- (g) Plat Review may make other reasonable monumentation requirements to accommodate unusual circumstances.

The following requirements must be met on an Assessor's Plat:

s. 236.20 (1) GENERAL REQUIREMENTS

(a) & (c) 1" margin on all sides.
(Drawing area 20" x 28")
-Graphic scale not over 100' to 1" on each sheet showing layout features.
[see <u>s. 70.27 (5)</u>, Wis. Stats. for scale waiver]
-Sheets numbered as sheet ______ of _____ sheets if more than one sheet.
-Plat name and county on each sheet
-Submit Acrobat PDF created from CAD (please no scans) or paper copy of drawing on any material that is capable of legible reproduction.
-Recordable document is durable white media 22" wide and 30" long, prepared with a nonfading black image.

s. 236.20 (2) MAP AND ENGINEERING INFORMATION

The boundaries of each parcel, along with buildings, improvements, and fixtures must be shown.

(a) All exterior boundaries. (Drawn with a heavy solid line.)

(b) All monuments, corners, and other points established in the field; indicate material used, except that lot, outlot and meander corners need not be shown. -A description of the monuments, including for metal monuments the kind of metal, the diameter, length, and weight per linear foot.

-All monuments must be described as "found" or "set".

(c) Exact length and bearing of all exterior blocks, public grounds, streets, alleys, and lot lines (except where parallel).

-Easements by center or boundary line length/bearing/width, or by width when parallel to other survey lines.

-Previously recorded bearings & lengths shown "Recorded as _____".

- (d) Blocks, if designated, consecutively numbered.
- (e) Lots and outlots in each block consecutively numbered.
- (L) Strict compliance with requirements of this section may be waived by Plat Review.

s. 70.27 (5) RECORDING DATA (VOLUME, PAGE, AND DOC. NO.) FOR EACH

PARCEL. (See example Boundary Line Agreement Table in Assessor's Plat section of Wisconsin Platting Manual.)

The following requirements must be met on an Assessor's Plat:

s. 70.27 (7) PROFESSIONAL LAND SURVEYOR'S CERTIFICATE

- (a) The name of the governing body who ordered the plat and the date (and resolution #, if applicable) of the order.
- (b) A clear, concise description, by gov't. lot, 1/4-1/4 section, township, range and county, and by metes and bounds beginning with a corner marked and established in the U.S. Public Land Survey (not center of section), or if wholly within a recorded plat or CSM by reference to such plat or CSM.
- (c) Statement that the plat is a correct representation of all the exterior boundaries of the land surveyed and each parcel thereof.
- (d) Statement that provisions of s. 70.27 have been fully complied with.

PROFESSIONAL LAND SURVEYOR'S CERTIFICATE MUST BE:

Registration. No.

Signed	Dated
Sealed	Notarized

The following property survey standards must be met on an Assessor's Plat:

A-E 7.04 DESCRIPTIONS

Descriptions shall contain ties to adjoiners such that unequivocal identification of lines and boundaries is provided.

<u>A-E 7.05</u> MAPS

(2) Bearings referenced to a magnetic, true, or other identifiable line of the public land survey, recorded and filed subdivision, or to the Wisconsin coordinate system.

A-E 7.06 MEASUREMENTS

(4) All closed traverses shall have a latitude & departure closure ratio of less than 1 in 3,000.

(5) Bearings or angles shown to the nearest 30 seconds; Distances to the nearest 1/100th foot.

The following platting standards should be met on an Assessor's Plat:

s. 236.15 (2) ACCURACY OF SURVEY

Ratio of error in latitude and departure closure of any part of the survey less than 1/3000'. --Survey by Wisconsin Professional Land Surveyor [see <u>A-E 7.06 Wis. Admin. Code</u>]

s. 236.20 (2) MAP AND ENGINEERING INFORMATION

(f) Exact width of all easements, streets, alleys.

- (g) Lengths and bearings of all meander lines, with distances between intersections of meander lines with lot lines and determined or approximated ordinary high water mark.
 -If approximated, ordinary high water mark noted "for reference only".
- (h) Center line of all streets.
- (i) North point properly located; referenced to identifiable direction and 1/4 section, P.C., or Federal Reservation Line.
- \Box (j) Lot or outlot area in square feet.
- (k) CURVES: Main chords drawn as dotted or dashed lines and both tangent bearings shown. Arc length, chord bearing and length, radius, and central angle shown for main curve and each segment. Street on circular curve of less than 30' radius, tangent to street lines show radius of curve and tangent distances.

<u>s. 236.20 (3)</u> NAME IN PROMINENT LETTERS, NOT A DUPLICATE WITHIN COUNTY OR MUNICIPALITY

(a) Immediately under plat name show government lot, recorded private claim,
1/4 - 1/4 section, section, township, range and county.

- (b) Tie by bearing and distance to a boundary line of 1/4 section, P.C. or Federal Reservation. Description of monuments at ends of boundary line.
- (c) Small drawing oriented same as main drawing, showing section or a government subdivision of section in which the plat lies, or relationship of plat to existing streets.
- (d) Names of adjoining streets, state highways, subdivisions and other land divisions in proper location, underscored by dotted/dashed lines.
- (e) Abutting street and highway right-of-way lines with dotted or dashed lines and in proper location; abutting street and highway right-of-way widths.

s. 236.20 (4) ROADS AND PUBLIC SPACES

- (a) Name of each road and street in plat.
- (c) Mark clearly all non-public roads "Private Road", "Private Street" or "Private Way".

s. 236.20 (5) SITE CONDITIONS AND TOPOGRAPHY

- (b) All watercourses, drainage ditches, other pertinent features.
- (c) Water elevations of adjoining lakes or streams at date of survey, approximate high water elevations, referred to permanently established datum plane.

s. 236.20 (6) PUBLIC TRUST INFORMATION

Plats bounded by or containing navigable lakes, rivers or streams must show the following statement: "Any land below the ordinary high water mark of a lake or navigable stream is subject to the public trust in navigable waters that is established under article IX, section 1, of the state constitution."

Assessor's Plat Clerk's	Plat Review – DOA Mailing Address: PO Box 1645, Madison WI 53701
Transmittal Form	Maning Address. 1 C Box 1040, Madison W100701
	Phone: 608-266-3200
Plat Review	Email: plat.review@wi.gov
WI Department of Administration	Web: <u>http://doa.wi.gov/platreview</u>
Subdivision Name:	
County:	
City/Town/Village: of	
As clerk I am aware that the above listed as	ssessor's plat has been transmitted to the Wisconsin
Department of Administration for review in c	compliance with <u>s. 70.27 (8)</u> , Wiscsonsin Statutes.
Prepared By Clerk:	
City/Town/Village: of	
Clerk's Name:	
Clerk's Phone:	
Clerk's Email:	
Date:	
	O:\Forms\WI_Assessors_Plat_Clerk_Transmittal_Form.doc

SAMPLE ASSESSOR'S PLAT CERTIFICATION LETTER

This letter is sent by Plat Review to the Clerk of the Town, County, or Municipality that directed that the Assessor's plat be made, to provide confirmation that Plat Review has certified no objection to the Assessor's plat.



JIM DOYLE GOVERNOR MICHAEL L. MORGAN SECRETARY Plat Review PO Box 1645, Madison WI 53701 (608) 266-3200

E-mail: <u>plat.review@wi.gov</u> <u>http://doa.wi.gov/platreview</u>

July 27, 2005

PERMANENT FILE NO. 25471

MAUREEN B. KRUEGER CLERK, TOWN OF POYGAN 8291 TRITT RD OMRO WI 45619

Subject: ASSESSOR'S PLAT NO. 3 TOWN OF POYGAN NE 1/4 S 16 T19N R14E TOWN OF POYGAN, WINNEBAGO COUNTY

Dear Ms. Krueger:

You have submitted ASSESSOR'S PLAT NO. 3 TOWN OF POYGAN for review. The Department of Administration does not object to this assessor's plat. Therefore, the recordable muslin-backed paper document has been certified as complying with the provisions of ss. 236.15 (1) (a) to (g) and 236.20 (1) and (2) (a) to (e), Wis. Stats.

DEPARTMENT OF ADMINISTRATION - PLAT REVIEW COMMENTS:

Plat Review has no conditions for this plat.

A class 3 notice, under Ch. 985, shall be published and the plat shall remain on file in your office for 30 days after the first publication. At any time within such 30-day period, any person or public body having an interest in any lands affected by the plat may bring a suit to have such plat corrected. If no such suit is brought within such time, the plat may be approved by the Town Board and filed for record.

Any changes to the plat involving details checked by this Department, unless court ordered, (see s. 70.27 (8), Wis. Stats.), will require submission of the plat to the Department for recertification before the plat is eligible for recording. Such changes can be found by comparing the recordable document with the half-size copy furnished the letter recipients listed.

Page 2 ASSESSOR'S PLAT NO. 3 TOWN OF POYGAN MAUREEN B. KRUEGER July 27, 2005

0205

If there are any questions concerning this review, please contact our office, at the number listed below.

Sincerely,

Reneé M. Powers, Supervisor Plat Review Phone: (608) 266-3200

Enc: Recordable Document

cc: Andrew J. Shie, Surveyor (w/ Original & Print.) Winnebago County Planning & Zoning Committee Register of Deeds

ORIGINAL RECEIVED FROM CLERK ON 5/12/05; REVIEWED ON 6/15/05; SUBSTITUTE ORIGINAL RECEIVED FROM SURVEYOR ON 6/30/05.

VZZŁZZV	R'S PLAT	Legend: ▲ P.K. Nail, Found	W 1/4 Corner Sec. 3, T13N, R24E 2"diam. Fd. Iron Pipe	Center of Sec. 3, T1 P.K. Nail,
			EAST, 264	
of The Village	of Dogpatch	1.05" Round Iron Pipe, Found		1320.00'
0	01	× Found chiseled "x" in concret SW 1/4 ♀ 2.375" OD X 30" Round Iron	<u> </u>	
of Section 3. Town 13 North.	Ranae 24 East. Village of Doap	atch • 2.375" OD Round Iron Pipe, F	ound	HINO
KICKAPOO COUNTY, WISCONSIN		All Other Lot and Meander Co	orners	<u> </u>
		1.315" OD X 24" Iron Pipe 1.6		I VQL. 13 PA
BOUNDARY LINE AGRE		— * * * Existing Fenceline Encroaching Structures. Note:	1 1/4" iron retor fd. ⇒+ 177.71	190°00 ⁹ 00"E 402.47'
	A 44	structures not shown per agr		• I - I - I - I - I - I - I - I - I - I
1 Bert L & Susie K Matthews 14 233 233		SURVEYOR'S CERTIFICATE	31	
2 Daniel P & Dolly Sandwich 12 294 119 3 Frieda L Smith 13 252 167	271 11.572 st Den Sink Dolly S. Sandwich 379 11,514 st Tiers Z. Inver	I, Jane Doe, Professional Land Surveyor, certify the surveyed and mapped ASSESSOR'S PLAT I of the V in Govt. Lot 2 and the NE 1/4 and NW 1/4 of t	/illage of Dogpatch, located	W Q A A A A A A A A A A A A A A A A A A
		Town 15 North, Range 24 East, Village of Dogpate	ch, Kickapoo County, "OB ZI	
4 John J & Jennifer M Jones 12 122 100 5 Dept. of Natural Resources 12 405 125	, , , ,	Commencing at the West Quarter corner of said	Section 3; thence EAST,	
	275 5,303 ST 275 7.722 st Donall V Drahe	thence WEST, 148.34 feet to a found 1 1/4" iron 327.94 feet to a found 1 1 /4" iron	e point of beginning; n rebar; thence NORTH, e EAST, 402.47 feet to the	196.56 N90758'07'E 196.56 N90758'07'E 196.56 N90758'07'E 0 196.56 N90758'07'E 0 196.56 N90758'07'E 0 196.56 N90758'07'E 0 196.56 N90758'07'E 0 196.56 N90758'07'E
	123 6.926 st Ama & Admitt	Wisconsin, described as: Commencing at the West Quarter corner of said 1320.00 feet; thence SOUTH, 1320.00 feet to the thence WEST, 148.34 feet to a found 1 1/4" iron 327.94 feet to a found 1 1/4" iron rebar; thence northwest corner of PLAT OF THE LAKE SHORE; the of said plot, SOUTH, 477.40 feet to the southwest said plot and a found P.K. nail; thence along the EAST, 341.12 feet to a found 2" iron pipe; thence said plot SOUTH, 412.80 feet to a found 2" iron meander corner being NORTH, 16 feet more or le: LAKE KICKAPOO; thence along said meander line til S78'44'25'W, 188.00 feet; S75'48'59'W, 253.30 f S77'57'38'W, 168.01 feet to a found 2" iron pipe said meander line, said corner being NORTH 20 fe water's edge of LAKE KICKAPOO; thence NORTH 120 fe water's edge of LAKE KICKAPOO; thence NORTH 120 fe	ence along the west line OK	
8 Lee L & Candy J Taylor 15 231 333		said plat and a found P.K. nail; thence along th EAST, 341.12 feet to a found 2" iron pipe; thence	e south line of said plat, 1 1/4" iron 148.34 e along the west line of 1/4" iron 148.34	
	13,193 sf John F Jones Junipe M. Junes	said plat SOUTH, 412.80 feet to a found 2" iron meander corner being NORTH, 16 feet more or le	pipe meander corner, said ss from the water's edge of	C E Φ C EAST 194.13'
	23 11.613 sf Mark () MH	LAKE KICKAPOO; thence along said meander line the S78'44'25"W, 189.00 feet; S75'48'59"W, 253.30 f	ne following three courses: eet; and,	EAST 194.14' 60
	27 8,304 sf Mary L. Mitten	S77'57'38'W, 168.01 feet to a found 2" iron pipe said meander line, said corner being NORTH 20 fe	marking the end of set more or less from the	01.13
12 Frank R Bunt 15 12 378	-	water's edge of LAKE KICKAPOU; thence NURIH 1L of beginning. Including the lands between the abov and the water's edge of LAKE KICKAPOO. Plat con	UNPLATIED	[≠] 19 8 2 - <u>126.71</u> - ₩5522*13₩
13 Janice P & David R Folk 23 56 672	240 5,779 st Jone P Jola Jun le To en	feet, or 13.028 acres, more or less.		N85°27'13'W
14 Janice P Folk 6 78 778	12 10,038 sf Jonie P. Jole	That I have made such survey and plat by the di Dogpatch, by Resolution No. 89-125, dated Augus That the plat is a correct representation of the e	xterior boundaries and	182.8 92.1 8
15 Dale G & Madge Rock 80 555 987	280 13.046 sf Dal Role Modge Rich	each parcel thereof. That I have fully complied with	th the provisions of	2 194.37 56 [°] W 00
16 John J & Jennifer M Jones 13 452 147	92 28,554 sf John F. Jones Junnipe M. Jones	s. 70.27 Wis. Stats.	24th day of October, 1989.	96. 17 96. 17 98. 17
17 CT Associates 37 61 987	19.827 sf Jack President	State of Wisconsin) SS County of Kickapoo)	-	
	325 16,109 st Milla I Holerte Dugon Robits	Personally came before me this <u>25th</u> day of <u>2</u> dd named Jane Doe, to me known to be the person	deer_, 1989, the above—	6.29 194.14 WEST
	33 24,958 of Misen I Hoberts Augor Robits	foregoing instrument and acknowledged the same.		
	515 17,217 sf Ben gwm		<u>rch 8, 1997</u> Govt. Lot 1 در المربقي المربقي المربقي Govt. Lot 1	PARK
	177 15,219 of 2 Am Brown Inga H. Brown			
22 Edward Z & Janine P Joy 9 106 877.		Curve Data Table	TH DELTA TAN BRGS	B Village
23 Edward Z & Janine P Joy 201 22 170		A-B 60.00' S87'34'34"E 60.02' 314.13	3' 299'58'24" N57'33'46"W	n Brark B
24 Gregory E Knowles 12 231 997	17 19,936 st Gregory E. Knowles 33 13,504 st Bor Brown (clark)	22 60.00' N44°06'54"E 82.20' 90.50	6' 86'28'24"	
25 Village of Dogpatch 15 45 312	33 13,504 st Ber Brown (clerk) 186 93,290 st Ber Brown (clerk)	23 60.00' S15'07'08"E 117.17' 162.3	38' 155'03'32" S62'24'38"W UNPLAIIE LANDS	
PARK Village of Dogpatch 10 98 917 Outlot 1 John Q Smith 12 435 856	5. / 6			
		3./9		
VILLAGE RESOLUTION Be it resolved that ASSESSOR'S PLAT I OF THE V	ILLAGE OF DOGPATCH in the Village of Dogpatch,	914.41		
be it resolution ASSESSOR'S PLAT I OF THE V having been ordered by the Village Board and al having been sent and on file in the office of th no suit having been commenced to have such p VILLAGE OF DOGPATCH is hereby approved by the	notices required by s. 70.27 Wis. Stats. 9 Village Clerk for a period of 30 days, and the corrected ACCESSOR'S DIAT LOC THE			
VILLAGE OF DOGPATCH is hereby approved by the	Village Board.			⊥ <u>Σ</u> <u>0</u> <u>0</u> <u>0</u> <u>0</u> <u>0</u> <u>0</u> <u>0</u> <u>0</u>
Village Administrator	Date	Care Pres /	T	k≰ 8,9 / ∓87 ∓tr
Multiple Olivel	Data		$\begin{vmatrix} \mathbf{a} \\ \mathbf{a} \end{vmatrix} = 7$	
Village Clerk	Date	SUISCONSTILL SCONSTILL	³⁶ 6 2.18 7 ΥΟL 24 P.G. 2 Ordinary High Water Mark a Ordinary High Water Mark a	89:49
	All dimensions measured and shown to the nearest hundredth		L = A established by surveyor L = A	# 85.01 N75
	of a foot; all angles measured to the nearest five seconds and		4.52 per s. 236.025 (2); shown for reference	N77"57"38"E
2" x 4 1/2" Space for Plat Review stamp	computed to the nearest second.	1.26 JURY ENTITY 1.26	only.	N77'57'38"E 100
	Water elevations: 10/01/89 800' Appx. low water elev. 785'	0/24/89		
	Appx. low water elev. 785 Appx. high water elev. 803'	DETAIL	"A" Any land belowstream is sub-	ow the ordinary high water mark of a bject to the public trust in navigable w
	Elevations referenced to U.S.G.S.			under article IX, section 1, of the state

